


[Campucka] Hydraulic push-in coupling

(For 1000 (light gray))

CE



Part No.	G	Min. I.D. øD	F	L	X	Y	Weight (g)
CE-G-04-14L	1/4	3.5	26.0	64	19	19	85
CE-G-06-14L	3/8	6.0	29.0	72	22	22	115
CE-G-08-14L	1/2	9.0	35.0	83	27	27	205

△ Caution: If you use Campucka, the maximum working pressure for Campucka must be applied.
 △ Caution: Handle with care not to drop couplings as an inner nipple could be self locked by pushing-out action to inlet of coupling.

- Material: steel
- Surface finishing: zinc electro-galvanized with color chromating (Ep-Fe/Zn 5/CM2)
- Maximum working pressure: 10.5MPa
- Working temperature range: -20 to +100°C
- Adaptor: 110, 145, 190, 130, C70, C74, C79

Features of Campucka and assembly mechanism

Assembling method P.73

1. Push-one connection

- Reduction of operation time (half that of our conventional product)
- Specialized swaging tool is not necessary. (Easy handling)
- Best for on-site length adjustment.
- Convenient for emergency repair.

2. Detachable hose

- Hose is detachable for length adjustment when piping.
- Detachable tool is available.
- △ Caution: Cannot be detached after pressurization.


3. Correcting hose's twisted direction

- It is possible to correct the twisted direction of a hose.
- △ Caution: Cannot be detached after pressurization.

4. Nipple stop mechanism

- Ratchet mechanism of our original lock ring is employed.
- Steady performance even for movable piping.
- Pressure variation is accommodated.


Campucka assembly mechanism

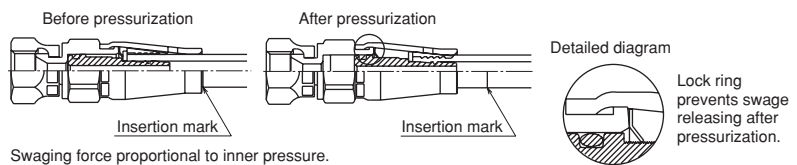

△ Caution: Handle with care not to drop couplings as an inner nipple could be self locked by pushing-out action to inlet of coupling.

[Swage]

SE

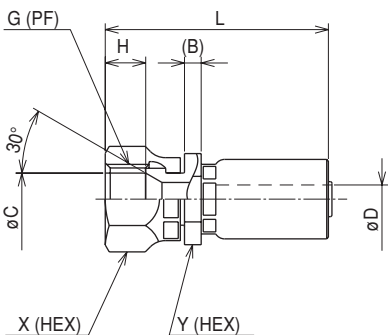

Part No.	Size No.	G	B	C	Min. I.D. øD	H	L	X (HEX)	Y (HEX)	Wt. (g)	Pusher	Die
SE-PF-04-14	04	1/4	4.0	9.5	3.5	8.0	49	19	17	55	PSE14-04	SP14-04
SE-PF-06-14	06	3/8	4.0	12.5	6.8	9.5	53	22	19	71	PSE14-06	SP14-06
SE-PF-08-14	08	1/2	4.5	16.0	9.5	12.0	61	27	24	125	PSE14-08	SP14-08

- Material: steel
- Surface finishing: zinc electro-galvanized with color chromating (Ep-Fe/Zn 5/CM2)
- Adaptor: 010, 045, 090, 150, 020, 025, 064, 069, 030, D70, D74, D79
- ☞ Applicable hose couplings are the same as those for 1000 series.